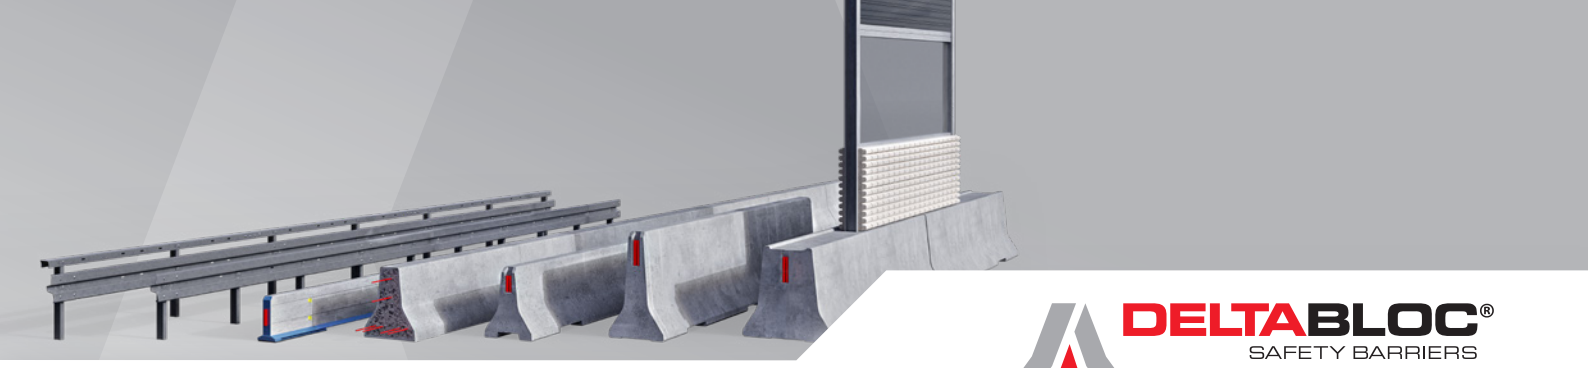

DELTABLOC®
SAFETY BARRIERS

SL 70 6 m T180S
H1 W4 B
surface mounted on asphalt

PRODUCT DATA SHEET

K764740A

Performance class	H1 W4 VI4 B
Working width W_N	W4 (1,3 m)
Vehicle intrusion VI_N	VI4 (1,2 m)
Dynamic deflection	1,10 m
Tested system length	78 m
EC Certification report	725221830_9

Product series	SL 70 Series
Tension bar	T180S
Design	Generation
Product variant	

System height	70 cm
System width	30 cm
Dimensions of element (l × w × h)	600 × 30 × 70 cm
Element weight / length	1.550 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Terminal anchoring	yes
Article number / Installation drawing	205805 / K764740

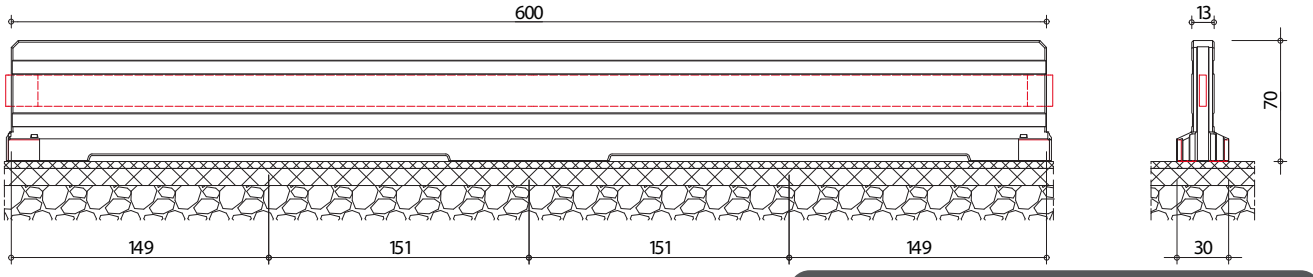

FIND ALL PRODUCT DETAILS ON THE DELTABLOC® EXTRANET

Matching supplementary products, SafeLink transitions etc.

Scan the QR code

THE SUSTAINABLE SL 70 BARRIER
MINIMUM CARBON FOOTPRINT

For temporary and permanent applications.
Lowest weight and highest performance.

KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®
HOME OF ROAD SAFETY

DELTABLOC INTERNATIONAL GMBH
Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com

© 2024 DELTABLOC International GmbH. All rights reserved.
Subject to printing or typographical errors.